

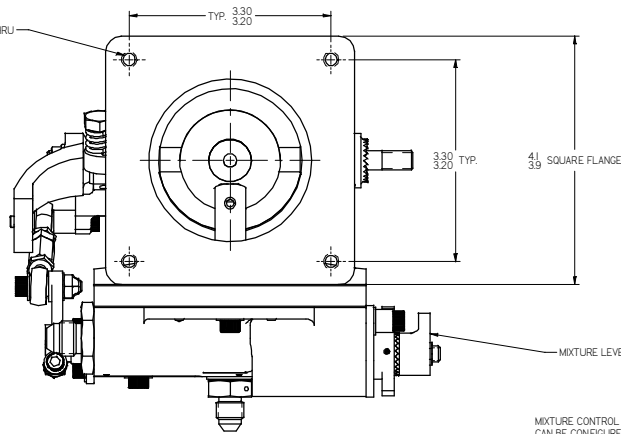
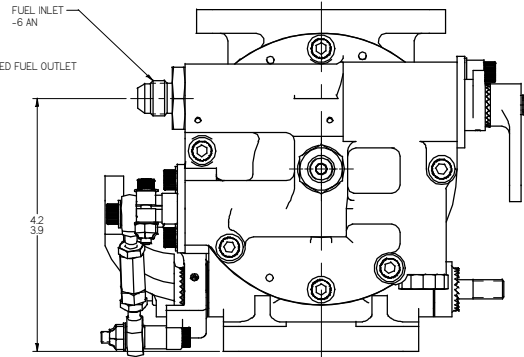


NOTES:
 1. MAXIMUM INLET FUEL PRESSURE 90 PSIG.
 2. RECOMMENDED OPERATING TEMPERATURE -50 DEGREES F TO 300 DEGREES F.
 3. CARB LOSS: 10" H2O AT 1500 PPH AIRFLOW WITH .0765 AIR DENSITY.
 4. FUEL CONTROL WEIGHT, 4.7 LBS.



250-20 UNC THD. THRU
 4 PLACES

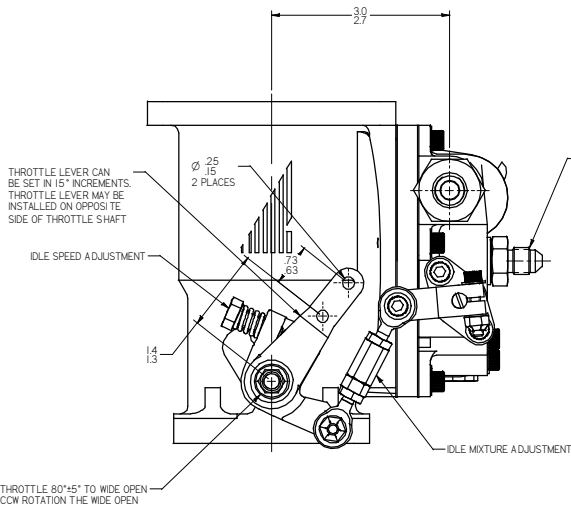

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



MIXTURE CONTROL ROTATION 80°±5°
 CAN BE CONFIGURED CW OR CCW TO RICH
 CCW TO RICH STANDARD

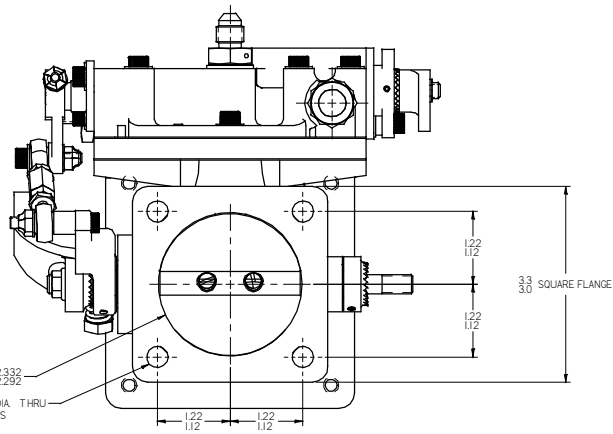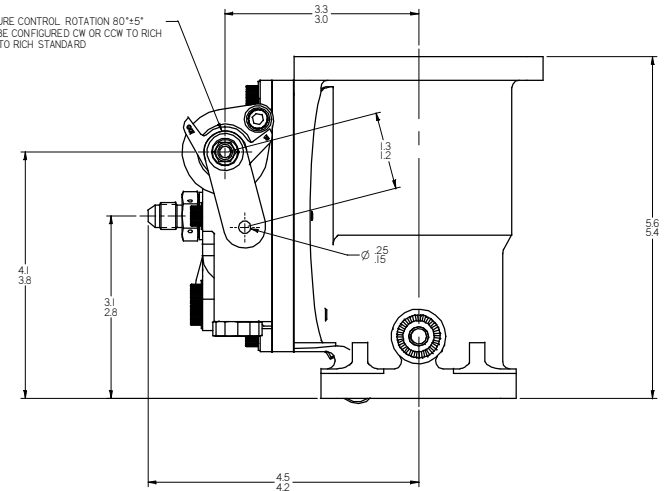

PROTECTIVE COAT:		FM-150 FUEL CONTROL		
HEAT TREAT:		AIRFLOW PERFORMANCE, INC.		
MATERIAL:	SIZE D	PSG.MNO.	DRG.MNO.	REV
DATE: 4-2-08	SCALE: 1/1	DRAWN BY: DJR	APPROVED BY:	5150001